

PRODUCT DATASHEET

STW30 Series

Single-phase moulded case current transformers



KEY FEATURES

- 5-150 A primary current
- 5 A or 1 A secondary output
- 62 mm width
- 35 mm cable aperture
- Sealable terminal cover
- Supplied with mounting feet
- Compact design
- Current-flow arrows on case body

PRODUCT OVERVIEW

STW30 solid-core current transformers monitor current flow in commercial, industrial and utility applications. They connect to standard metering or relay products requiring a 5 A or 1 A output. Mounting feet and moulded current-flow markings simplify installation and help prevent connection errors.

PRODUCT SELECTION

Product code	Hole (mm)	Primary (A)	Class 0.5	Class 1.0	Class 3.0
STW30-5	-	5	1.5 VA	2.5 VA	-
STW30-10	-	10	1.5 VA	2.5 VA	-
STW30-15	-	15	1.5 VA	2.5 VA	-
STW30-20	-	20	1.5 VA	2.5 VA	-
STW30-30	-	30	1.5 VA	2.5 VA	-
STW30-40	-	40	1.5 VA	2.5 VA	-
STW30-50	-	50	1.5 VA	2.5 VA	-
STW30-60	-	60	1.5 VA	2.5 VA	-
STW30-75	-	75	1.5 VA	2.5 VA	-
STW30-100	-	100	1.5 VA	2.5 VA	-
STW30-150	-	150	1.5 VA	2.5 VA	-

All models available with 5 A or 1 A secondary output.

CE | RoHS

Technical specifications

STW30 Series / Electrical, environmental and mechanical data

ELECTRICAL RATINGS & INSULATION

Parameter	Specification
Rated primary current (I _{pr})	5-150 A
Frequency range	47-63 Hz
Rated continuous overcurrent	1.2 × rated current
Rated short-time thermal current (I _{th})	<60 I
Rated dynamic current (I _{dyn})	2.5 I _{th}
Instrument security factor (FS)	5
Rated secondary output	5 A or 1 A
Accuracy class	Class 0.5, 1 and 3 to IEC/EN 61869-2
Insulation type	Dry transformer, air insulation
Highest voltage (U _m)	0.72 kV r.m.s.
Rated insulation level	3 kV r.m.s., 50 Hz / 1 min

ENVIRONMENTAL CONDITIONS


Reference temperature	23°C ±1°C
Nominal temperature	-25°C to +50°C
Daily mean temperature	≤30°C
Storage temperature	-40°C to +85°C
Relative humidity	≤85%, non-condensing

HOUSING & CONNECTIONS

Housing material	Non-flammable, self-extinguishing ABS / polycarbonate
Protection (IEC/EN 60529)	IP40 housing; IP20 terminals
Mounting	Foot mounting
Primary winding	Wound primary
Secondary winding	Nickel-plated screw clamp connection, 6 mm

DIMENSIONS

All dimensions in mm

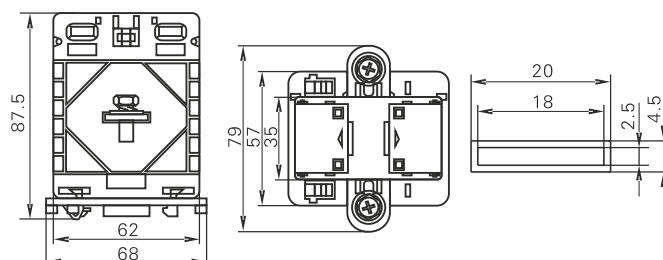

Source revision: V-21.05